


# Frequently Asked Questions

## MCS SINGLE-SIDED VERTICAL CABLING SECTIONS




**30091-X0X**  
3.65"W x 7.88"D

**Q~What is the usable size of this cabling section?**

**A.** 24 sq. inches

**Q~How many .25" patch cables with 40% fill factor will fit into this vertical cabling section?**

**A.** 192 cables = (8) 24 port patch panels

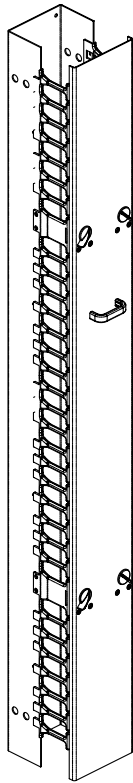


**30092-X0X**  
6"W x 7.88"D

**Q~What is the usable size of this cabling section?**

**A.** 41 sq. inches

**Q~How many .25" patch cables with 40% fill factor will fit into this vertical cabling section?**

**A.** 336 cables = (14) 24 port patch panels

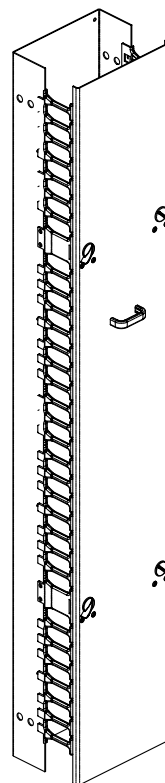

**30093-X0X**  
10"W x 7.88"D

**Q~What is the usable size of this cabling section?**

**A.** 70 sq. inches

**Q~How many .25" patch cables with 40% fill factor will fit into this vertical cabling section?**

**A.** 576 cables = (24) 24 port patch panels

### Frequently Asked Questions Common To All Three Cabling Sections

**Q~Is the mounting hardware included?**

**A.** Yes. The hardware kit includes 8 bolts, nuts, and washers to mount racks on both sides of the cabling section. If the customer loses the hardware, contact Chatsworth Products Technical Support.

**Q~What size bolt is used in the mounting hardware kit?**

**A.** ½-20 x 1"

**Q~How many .25" patch cables with a 40% fill factor are recommended per cable guide?**

**A.** 29 cables

**Q~Is there an option to purchase MCS without the door?**

**A.** No. The door is an integral functional component that helps conceal and contain the cable.

**Q~Is the door available in plexiglass?**

**A.** No. The design of MCS products will only work with a metal door.

**Q~Will MCS mount to all CPI racks?**

**A.** Yes. MCS of any style is adaptable to all CPI self-support racks including 6" D High Density Rack, Universal Rack and Standard Rack.

**Q~Is the plastic plenum rated?**

**A.** Yes. It meets UL 94V-0 Flame Resistant standards.