


# Product Information Sheet

## VERTICAL CABLING SECTION (VCS) OFFSET MOUNTING BRACKET KIT FOR SEISMIC FRAME® TWO-POST RACK

Attach a CPI Single-Sided Wide Vertical Cabling Section to the side of the Seismic Frame® Two-Post Rack so that it aligns with the front of the rack. Use with the Cable Management Fingers Kit for Seismic Frame Two-Post Rack to provide by-RMU cable management. The Seismic Frame Two-Post Rack is designed specifically to support network equipment in areas with seismic activity. The welded, steel Seismic Frame Two-Post Rack resists the swaying motion caused by earthquakes to reduce the amount of vibration transferred through the rack to equipment and is less likely to be damaged during a seismic event, which means faster network recovery.

- Kit includes four Offset Mounting Brackets
- Use two brackets per side to attach the Vertical Cabling Section
- Brackets are slotted allowing front-to-rear adjustment
- Made of steel

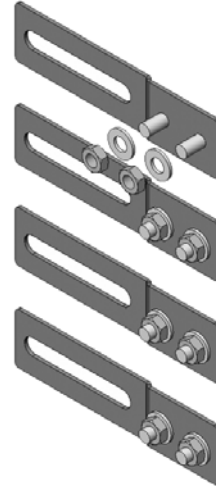

Part Number	Description	Shipping Weight
13699-701	VCS Offset Mounting Bracket Kit	2 lb (0.9 kg)

*Color is Black.*

800-834-4969 in U.S. & Canada • [www.chatsworth.com](http://www.chatsworth.com)



CHATSWORTH PRODUCTS, INC.

©2008 Chatsworth Products, Inc. All rights reserved. CPI, CPI Passive Cooling, Saf-T-Grip, Seismic Frame, SlimFrame and MegaFrame are federally registered trademarks of Chatsworth Products, Inc. Cube-IT Plus, Evolution, Simply Efficient, TeraFrame and QuadraRack are trademarks of Chatsworth Products, Inc. All other trademarks belong to their respective companies. NB/08/08