Installation Instructions

VersaEdgeÊ Wall-Mount Cabinet Fan Kit

WARNING: Improper use of this product may lead to serious injury. Read and understand all instructions for proper installation and use of this product.

Included Hardware:
M5 Taptite Screws, 6 ea.

Tools Required:
T25 Torx Driver
#2 Philips Screwdriver

Installation Instructions

The Fan Kit attaches to the inside of the Cabinet Shell side walls (Fig. 1), and the Magnetic Blanking Panel attaches to the inside of the door over the bottom perforation (Fig. 3). Additional fans can be installed by removing knockouts. It is recommended to install the Fan Kit with the Cabinet Shell removed from the Rear Chassis.

1. If installing more than (1) fan per panel, remove the desired knockout(s) by inserting a Screwdriver into the rectangular cutouts and breaking the material away from the panel. Only remove knockouts that will be replaced by a fan, or there will be air leakage in the cabinet.
2. Install the fan(s) onto the panel using the included screws and a #2 Philips Screwdriver (Fig. 2).
3. Install the Fan Kit panels onto the inside of the Cabinet Shell side panels using the included (6) M5 Taptite Screws and a T25 Torx Driver (Fig. 1). Ensure the fans are biased towards the door to maximize heat dissipation in the cabinet.
4. Install the Magnetic Blanking Panel on the inside of the door, covering the lower perforation fully (Fig. 3).

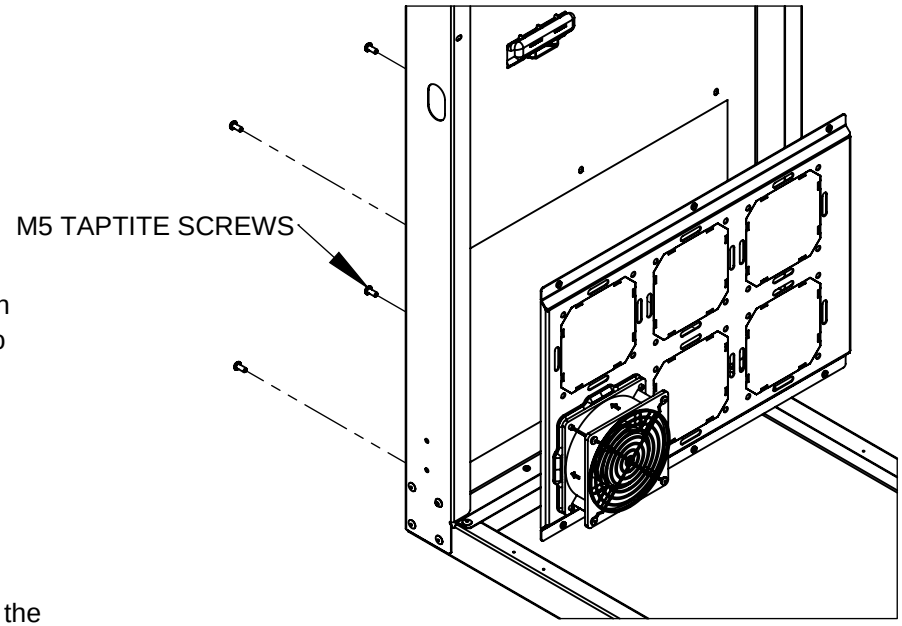

Fig. 1

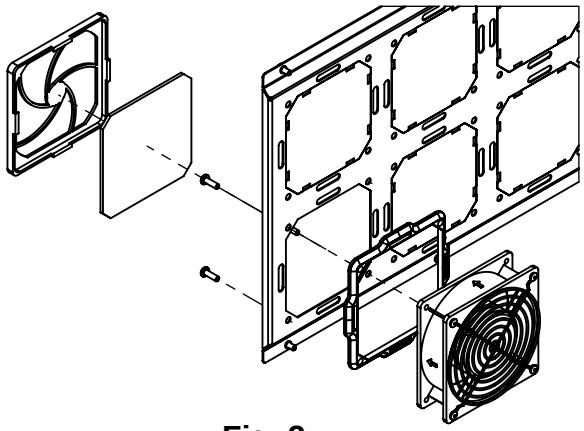

Fig. 2

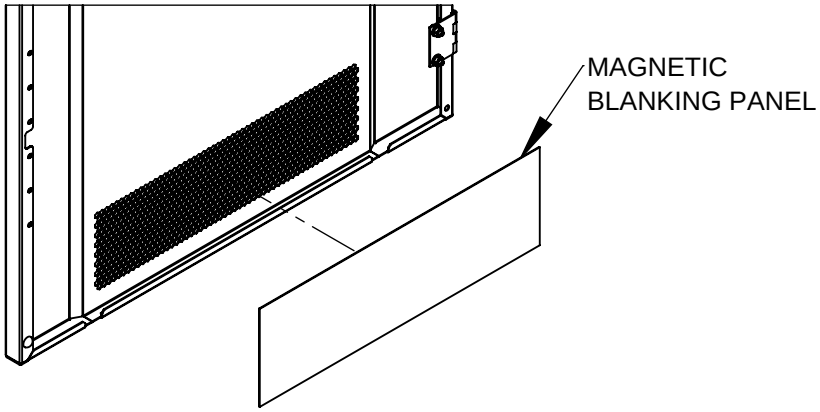

Fig. 3

This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.