Installation Instructions

21" TO 19" EIA ADAPTER BRACKET, ORV3

WARNING: Improper use of this product may lead to serious injury. Read and understand all instructions for proper installation and use of this product.

Included Hardware:
M5 X12mm Torx Screw
M6 X12mm Torx Screw, 2 ea. (23U only)
M6 Cage Nut, 2 ea. (23U only)

Tools Required:
T25 Torx Driver
T30 Torx Driver (23U only)

Installation Instructions
The EIA Adapter brackets (Fig.1 & Fig. 2) attach to the cabinet rails (Fig. 3 & Fig. 4).

1. Position the EIA Adapter Bracket at the desired OU location & depth in cabinet. The top of the bracket is indicated by a punched arrow (Fig. 3, detail B).

2.Fasten the EIA Adapter Bracket using M5 x12mm Torx Screws into the cabinet rails (Fig. 3, detail B).

3. The 23U EIA Adapter Bracket assembly includes an air dam bracket that should be installed at the top of the brackets once the brackets are installed in the cabinet (Fig. 2, detail A).

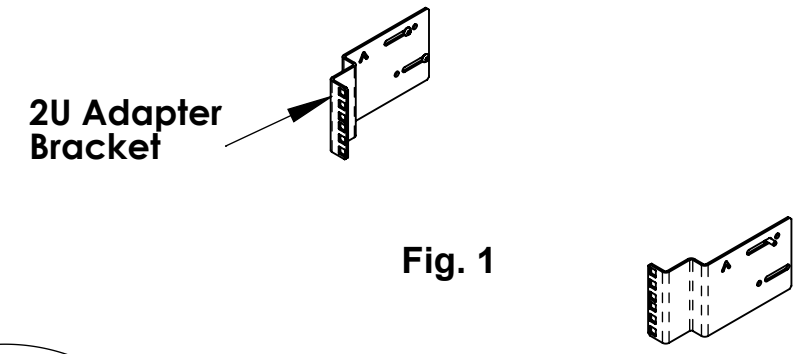


Fig. 1


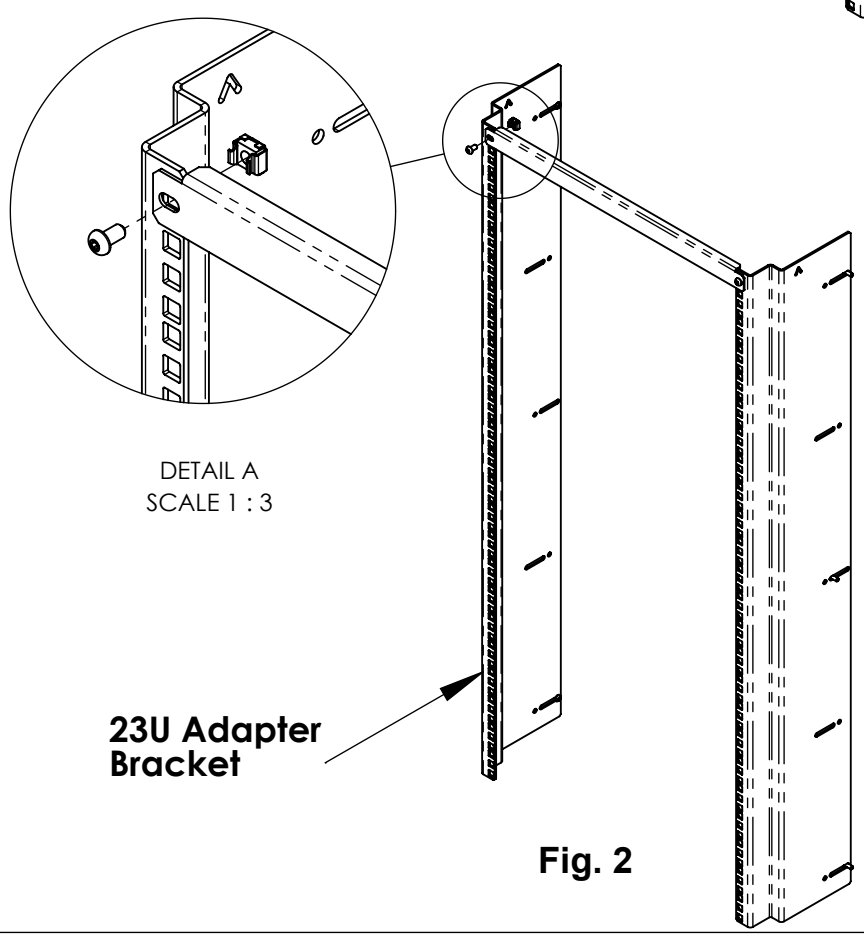


Fig. 2

This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.

Installation Instructions

21" TO 19" EIA ADAPTER BRACKET, ORV3

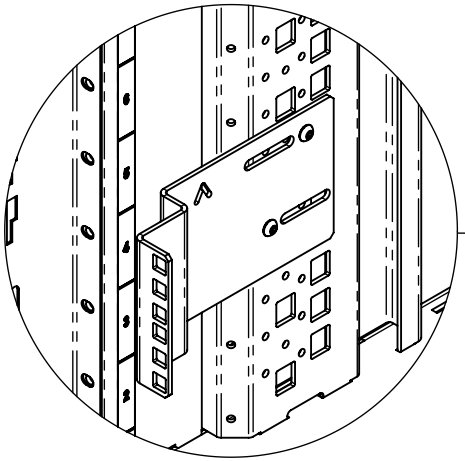

DETAIL B

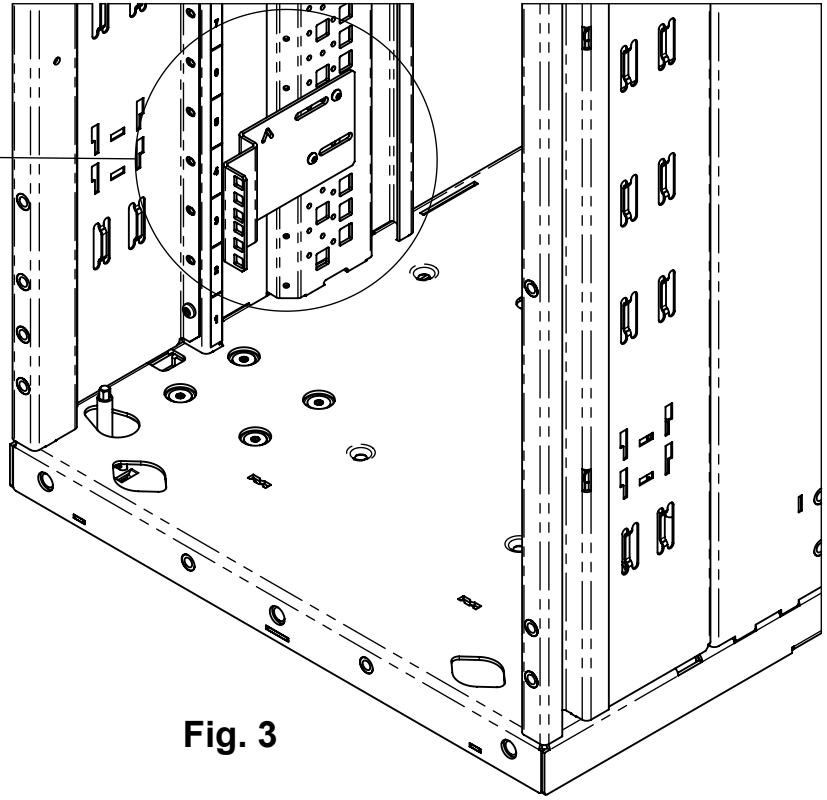


Fig. 3

