

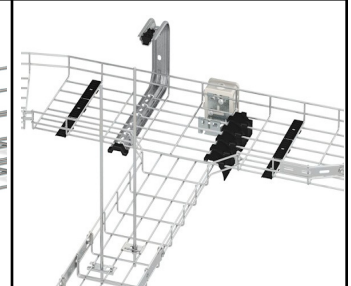











# Cable Runway & Tray Products



Universal Cable Runway	UL Classified Cable Runway	Adjustable Cable Runway	Supports for Cable Runway	Pemsma® Rejiband® Wire Mesh Cable Tray	Accessories for Pemsma® Rejiband® Wire Mesh Cable Tray
------------------------	----------------------------	-------------------------	---------------------------	--	--

<p><b>Application:</b> Use in telecommunication rooms, equipment rooms and data centers</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• UL Classified for suitability as an equipment grounding conductor only*</li> <li>• Remove paint to bond cable runway sections with splices or ground straps.</li> <li>• 9 widths</li> <li>• 1-1/2" H (38 mm) stringers</li> <li>• 12" (300 mm) cross member spacing</li> <li>• Powder-coated finish</li> </ul> <p><small>*Remove paint to bond cable runway sections with splices or ground straps</small></p> <p><b>Widths (9):</b></p> <table style="width:100%;"> <tr> <td>• 4" (100 mm)</td> <td>• 6" (150 mm)</td> </tr> <tr> <td>• 9" (230 mm)</td> <td>• 12" (300 mm)</td> </tr> <tr> <td>• 15" (380 mm)</td> <td>• 18" (460 mm)</td> </tr> <tr> <td>• 24" (610 mm)</td> <td>• 30" (760 mm)</td> </tr> <tr> <td>• 36" (910 mm)</td> <td></td> </tr> </table> <p><b>Length:</b></p> <ul style="list-style-type: none"> <li>• 119.5" (3035 mm)</li> </ul> <p><b>Support Spacing:</b></p> <ul style="list-style-type: none"> <li>• Load rating is 132 lb/ft with a support span of 5' (1.5 m)</li> </ul> <p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Welded steel, painted finish</li> </ul>	• 4" (100 mm)	• 6" (150 mm)	• 9" (230 mm)	• 12" (300 mm)	• 15" (380 mm)	• 18" (460 mm)	• 24" (610 mm)	• 30" (760 mm)	• 36" (910 mm)		<p><b>Application:</b> Simplifies the cable runway grounding and bonding process</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• UL Classified for suitability as an equipment grounding conductor only</li> <li>• Electrical bond is achieved via Splice Kits; a separate bonding step is not required, saving on installation time.</li> <li>• 7 sizes</li> <li>• 9" (230 mm) cross member spacing</li> <li>• Zinc-plated finish</li> </ul> <p><b>Widths (7):</b></p> <table style="width:100%;"> <tr> <td>• 6" (150 mm)</td> <td>• 9" (230 mm)</td> </tr> <tr> <td>• 12" (300 mm)</td> <td>• 15" (380 mm)</td> </tr> <tr> <td>• 18" (460 mm)</td> <td>• 20" (510 mm)</td> </tr> <tr> <td>• 24" (610 mm)</td> <td></td> </tr> </table> <p><b>Length:</b></p> <ul style="list-style-type: none"> <li>• 116.5" (2959 mm)</li> </ul> <p><b>Support Spacing:</b></p> <ul style="list-style-type: none"> <li>• Load rating is 132 lb/ft with a support span of 5' (1.5 m)</li> </ul> <p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Welded steel, zinc plated finish</li> </ul>	• 6" (150 mm)	• 9" (230 mm)	• 12" (300 mm)	• 15" (380 mm)	• 18" (460 mm)	• 20" (510 mm)	• 24" (610 mm)		<p><b>Application:</b> Cross Members can be easily repositioned for maximum versatility in aligning cable drops</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• UL Classified for suitability as an equipment grounding conductor only</li> <li>• Supports cable and fiber from floors, ceilings, walls and tops of cabinets and racks</li> <li>• Use in conjunction with other CPI Runway and accessories to form a complete pathway solution</li> <li>• Adapts to any data center or computer room</li> <li>• Ships assembled or unassembled</li> <li>• Powder-coated finish</li> </ul> <p><b>Widths (9):</b></p> <table style="width:100%;"> <tr> <td>• 4" (100 mm)</td> <td>• 6" (150 mm)</td> </tr> <tr> <td>• 9" (230 mm)</td> <td>• 12" (300 mm)</td> </tr> <tr> <td>• 15" (380 mm)</td> <td>• 18" (460 mm)</td> </tr> <tr> <td>• 24" (610 mm)</td> <td>• 30" (760 mm)</td> </tr> <tr> <td>• 36" (910 mm)</td> <td></td> </tr> </table> <p><b>Length:</b></p> <ul style="list-style-type: none"> <li>• 119.5" (3035 mm)</li> </ul> <p><b>Support Spacing:</b></p> <ul style="list-style-type: none"> <li>• Load rating is 132 lb/ft with a support span of 5' (1.5 m)</li> </ul> <p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Roll-formed Steel Stringers</li> <li>• Aluminum Cross Members</li> <li>• Painted finish</li> </ul>	• 4" (100 mm)	• 6" (150 mm)	• 9" (230 mm)	• 12" (300 mm)	• 15" (380 mm)	• 18" (460 mm)	• 24" (610 mm)	• 30" (760 mm)	• 36" (910 mm)		<p><b>Application:</b> Connect and support Cable Runway to form a continuous pathway for cables</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• Support cable runway from the ceiling, wall, floor or tops of racks and cabinets</li> <li>• Connect Cable Runway end-to-end with Butt Splice Kits</li> <li>• Create 90° L- or T-shaped intersections with Junction Splice Kits</li> <li>• Use E-Bends and Corner Brackets to make smooth turns</li> <li>• Change elevations with Radius Bends</li> <li>• Add Cable Retaining Posts when cables are stacked over 2" H (50 mm)</li> <li>• Tool-less Radius Drops and Cross Members can be repositioned anywhere along the runway for maximum versatility in aligning cable drops.</li> </ul> <p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Welded or formed steel, zinc-plated or painted finish</li> </ul>	<p><b>Application:</b> Use for high-density cable distribution in data centers and commercial spaces</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• UL Certified</li> <li>• Tray can be cut and formed into turns and transitions using standard splices</li> <li>• Zinc Electroplate and BLACK C8® finish options</li> <li>• Both finishes allow bonding through splice connections for electrical continuity.</li> <li>• The tops of trays are rounded and smooth to protect installers and cables from cuts</li> <li>• The BLACK C8 finish option meets resistance class IEC 61537 Class C8, delivering corrosion resistance almost equivalent to stainless steel.</li> </ul> <p><b>Widths (8):</b></p> <table style="width:100%;"> <tr> <td>• 4" (100 mm)</td> <td>• 6" (150 mm)</td> </tr> <tr> <td>• 8" (200 mm)</td> <td>• 12" (300 mm)</td> </tr> <tr> <td>• 18" (450 mm)</td> <td>• 24" (600 mm)</td> </tr> </table> <p><b>Length:</b></p> <ul style="list-style-type: none"> <li>• 118.1" (3 m)</li> </ul> <p><b>Support Spacing:</b></p> <ul style="list-style-type: none"> <li>• Load rating varies with tray size. The recommended support span is 5' (1.5 m)</li> </ul> <p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Welded steel, zinc electroplate or BLACK C8</li> </ul>	• 4" (100 mm)	• 6" (150 mm)	• 8" (200 mm)	• 12" (300 mm)	• 18" (450 mm)	• 24" (600 mm)	<p><b>Application:</b> Connect and support Pemsma Rejiband Wire Mesh Cable Tray to form a continuous pathway for cables</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• Support Pemsma Rejiband Wire Mesh Cable Tray from the ceiling, wall, floor or the tops of CPI racks and cabinets</li> <li>• Use above drop ceilings or below raised access floors</li> <li>• Many accessories require little to no tools to install, saving time and reducing labor costs</li> <li>• Use splice kits to attach and electrically bond sections of wire mesh tray together</li> <li>• Use cable management accessories to organize and protect cables</li> </ul> <p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Welded or formed steel; zinc electroplate, BLACK C8 or pregalvanized</li> </ul>
• 4" (100 mm)	• 6" (150 mm)																																						
• 9" (230 mm)	• 12" (300 mm)																																						
• 15" (380 mm)	• 18" (460 mm)																																						
• 24" (610 mm)	• 30" (760 mm)																																						
• 36" (910 mm)																																							
• 6" (150 mm)	• 9" (230 mm)																																						
• 12" (300 mm)	• 15" (380 mm)																																						
• 18" (460 mm)	• 20" (510 mm)																																						
• 24" (610 mm)																																							
• 4" (100 mm)	• 6" (150 mm)																																						
• 9" (230 mm)	• 12" (300 mm)																																						
• 15" (380 mm)	• 18" (460 mm)																																						
• 24" (610 mm)	• 30" (760 mm)																																						
• 36" (910 mm)																																							
• 4" (100 mm)	• 6" (150 mm)																																						
• 8" (200 mm)	• 12" (300 mm)																																						
• 18" (450 mm)	• 24" (600 mm)																																						



**Universal Cable Runway**

**UL Classified Cable Runway**

**Adjustable Cable Runway**

**Supports for Cable Runway**

**Pemsra® Rejiband® Wire Mesh Cable Tray**

**Accessories for Pemsra® Rejiband® Wire Mesh Cable Tray**

Part No.	Description	Wt. lb (kg)
10250-X04	1.5" H x 4" W x 9'-11.5" L 38 mm x 100 mm x 3 m	18 (8.2)
10250-X06	1.5" H x 6" W x 9'-11.5" L 38 mm x 150 mm x 3 m	19 (8.6)
10250-X09	1.5" H x 9" W x 9'-11.5" L 38 mm x 230 mm x 3 m	20 (9.1)
10250-X12	1.5" H x 12" W x 9'-11.5" L 38 mm x 300 mm x 3 m	25 (11.3)
10250-X15	1.5" H x 15" W x 9'-11.5" L 38 mm x 380 mm x 3 m	27 (12.2)
10250-X18	1.5" H x 18" W x 9'-11.5" L 38 mm x 460 mm x 3 m	29 (13.2)
10250-X24	1.5" H x 24" W x 9'-11.5" L 38 mm x 610 mm x 3 m	32 (14.5)
10250-X31	1.5" H x 30" W x 9'-11.5" L 38 mm x 760 mm x 3 m	35 (15.7)
10250-X37	1.5" H x 36" W x 9'-11.5" L 38 mm x 910 mm x 3 m	38 (17.2)
<i>Note: X=Color: 1=Gray, 2=Computer Beige, 7=Black, E=Glacier White.</i>		
<b>Key Accessories</b>		
Part No.	Description	Wt. lb (kg)
11301-001	Butt-Splice Kit	1 (0.5)
11302-001	Junction-Splice Kit	1 (0.5)
40164-025	Ground Strap Kit Pack of 25	12 (5.0)
11959-X15*	Corner Bracket, 15"W (380 mm)	4 (1.8)
10822-X12*	E-Bend, 12"W (300 mm)	12 (5.4)
10596-X56*	Cable Retaining Post, 6"H (150 mm), Pack of 50	33 (15.0)
10642-001	Protective End Caps	1 (0.5)
25400-X00	Touch-Up Paint, Spray Can, 12 oz (340)	2 (0.9)
13395-X04*	Patch Rack, 4U x 19"W w/Side Stringer Brackets	5 (2.3)
<i>Note: X=Color: 1=Gray, 2=Computer Beige, 7=Black, E=Glacier White. *Additional sizes available.</i>		

Part No.	Description	Wt. lb (kg)
11275-X06	1.5" H x 6" W x 9'-8.5" L 38 mm x 150 mm x 2.9 m	19 (8.6)
11275-X09	1.5" H x 9" W x 9'-8.5" L 38 mm x 230 mm x 2.9 m	20 (9.1)
11275-X12	1.5" H x 12" W x 9'-8.5" L 38 mm x 300 mm x 2.9 m	22 (10.0)
11275-X15	1.5" H x 15" W x 9'-8.5" L 38 mm x 380 mm x 2.9 m	26 (11.8)
11275-X18	1.5" H x 18" W x 9'-8.5" L 38 mm x 460 mm x 2.9 m	28 (12.7)
11275-X20	1.5" H x 20" W x 9'-8.5" L 38 mm x 510 mm x 2.9 m	29 (13.2)
11275-X24	1.5" H x 24" W x 9'-8.5" L 38 mm x 610 mm x 2.9 m	31 (14.1)
<i>X=Color over Zinc: 0=Gold, 7=Black.</i>		
<b>Key Accessories</b>		
Part No.	Description	Wt. lb (kg)
16301-001	Butt-Splice Kit	1 (0.5)
16302-001	Junction-Splice Kit	1 (0.5)
11959-X15*	Corner Bracket, 15"W (380 mm)	4 (1.8)
10822-X12*	E-Bend, 12"W (300 mm)	12 (5.4)
10723-X12*	Outside Radius Bend, 12"W (300 mm)	4 (1.8)
10724-X12*	Inside Radius Bend, 12"W (300 mm)	4 (1.8)
10596-X58*	Cable Retaining Post, 8"H (200 mm), Pack of 50	33 (15.0)
13395-X04*	Patch Rack, 4U x 19"W w/Side Stringer Brackets	5 (2.3)
<i>Note: X=Color: 1=Gray, 2=Computer Beige, 7=Black, E=Glacier White. *Additional sizes available.</i>		

Part No.	Description	Wt. lb (kg)
14300-X04	1.5" H x 4" W x 119.5" L 38 mm x 102 mm x 3035 mm	17 (8.0)
14300-X06	1.5" H x 6" W x 119.5" L 38 mm x 152 mm x 3035 mm	18 (8.2)
14300-X09	1.5" H x 9" W x 119.5" L 38 mm x 229 mm x 3035 mm	19 (8.6)
14300-X12	1.5" H x 12" W x 119.5" L 38 mm x 305 mm x 3035 mm	20 (9.1)
14300-X15	1.5" H x 15" W x 119.5" L 38 mm x 381 mm x 3035 mm	21 (9.8)
14300-X18	1.5" H x 18" W x 119.5" L 38 mm x 457 mm x 3035 mm	22 (10.9)
14300-X24	1.5" H x 24" W x 119.5" L 38 mm x 610 mm x 3035 mm	25 (11.0)
14300-X30	1.5" H x 30" W x 119.5" L 38 mm x 762 mm x 3035 mm	27 (12.0)
14300-X36	1.5" H x 36" W x 119.5" L 38 mm x 914 mm x 3035 mm	30 (13.0)
<i>X=Color: 1=Gray, 2=Computer Beige, E=Glacier White, 7=Black.</i>		
<b>Key Accessories</b>		
Part No.	Description	Wt. lb (kg)
14308-001	Tool-less Pathway Divider Pack of 10	2 (1.0)
14304-X12*	Tool-less Cross Member Radius Drop, 12"W (300 mm)	2 (1.0)
14305-X00	Tool-less Stringer Radius Drop, Large	3 (1.0)
14305-X01	Tool-less Stringer Radius Drop, Small	2 (1.0)
14302-X12*	Cross Member Kit, 12"W (300 mm)	4 (2.0)
14303-X10	Stringer Kit, 1.5" H x 0.4" W x 119.5" L 38 mm x 10 mm x 2025 mm	69 (31)
<i>Note: X=Color: 1=Gray, 2=Computer Beige, 7=Black, E=Glacier White. *Additional sizes available.</i>		
<i>Contact Tech Support at 800-834-4969 for assistance specifying splices and supports.</i>		

Part No.	Description	Wt. lb (kg)
<b>Triangle Support Bracket</b>		
11746-X12	Wall Support, Side, for 12"W (300 mm) Runway	5 (2.3)
11746-X18	Wall Support, Side, for 18"W (460 mm) Runway	8 (3.6)
11746-X24	Wall Support, Side, for 24"W (610 mm) Runway	9 (4.1)
<b>Wall Angle Support Kit</b>		
11421-X12	Wall Support, End, for 12"W (300 mm) Runway	3 (1.4)
11421-X18	Wall Support, End, for 18"W (460 mm) Runway	5 (2.3)
11421-X24	Wall Support, End, for 24"W (610 mm) Runway	6 (2.7)
<b>Center Support Kit</b>		
12362-X12	Ceiling Support, for 12"W (300 mm) Runway	2 (0.9)
12362-X18	Ceiling Support, for 18"W (460 mm) Runway	4 (1.8)
12362-X24	Ceiling Support, for 24"W (610 mm) Runway	5 (2.3)
<b>3" Channel Rack-To-Runway Mounting Plate</b>		
10595-X12	Rack-Top Support, for 12"W (300 mm) Runway	5 (2.3)
10595-X18	Rack-Top Support, for 18"W (460 mm) Runway	7 (3.2)
12408-X24*	Rack-Top Support, for 24"W (610 mm) Runway	4 (1.8)
<i>Additional sizes available. Use with CPI Standard and Universal Racks.</i>		
<b>Elevation Kit for 2-Post Racks</b>		
10506-X02	Elevates Runway, 2"H (50 mm), 2.5" H (64 mm) or 3" H (80 mm)	2 (0.9)
10506-X06	Elevates Runway, 4"H (100 mm), 5" H (130 mm) or 6" H (150 mm)	5 (2.3)
<i>Use with Rack-To-Runway Mounting Plate.</i>		
<i>Note: X=Color: 0=Gold, 1=Gray, 2=Computer Beige, 7=Black, E=Glacier White. *12408-024 not available Contact Tech Support at 800-834-4969 for assistance specifying splices and supports.</i>		

Part No.	Description	Wt. lb (kg)
602X2100-003	2" H x 4" W x 10' L 60 mm x 100 mm x 3 m	6 (2.7)
602X2150-003	2" H x 6" W x 10' L 60 mm x 150 mm x 3 m	7 (3.2)
602X2200-003	2" H x 8" W x 10' L 60 mm x 200 mm x 3 m	9 (4.0)
602X2300-003	2" H x 12" W x 10' L 60 mm x 300 mm x 3 m	14 (6.4)
602X2450-003	2" H x 18" W x 10' L 60 mm x 450 mm x 3 m	18 (8.2)
602X2600-003	2" H x 24" W x 10' L 60 mm x 600 mm x 3 m	23 (10.4)
602X3100-003	4" H x 4" W x 10' L 100 mm x 100 mm x 3 m	9 (4.0)
602X3150-003	4" H x 6" W x 10' L 100 mm x 150 mm x 3 m	10 (4.5)
602X3200-003	4" H x 8" W x 10' L 100 mm x 200 mm x 3 m	14 (6.4)
3602X3300-003	4" H x 12" W x 10' L 100 mm x 300 mm x 3 m	17 (7.7)
602X3450-003	4" H x 18" W x 10' L 100 mm x 450 mm x 3 m	22 (10.0)
602X3600-003	4" H x 24" W x 10' L 100 mm x 600 mm x 3 m	26 (11.7)
<i>Note: X=Finish: 1=Zinc Electroplate, 8=BLACK C8</i>		

Part No.	Description	Wt. lb (kg)
640X0061-050	Reinforced Joint Clamp Pack of 50	4 (1.8)
640X0060-050	Part Clamp Pack of 50	3 (1.3)
640X0020-025	Click Connector Pack of 25	5 (2.2)
670X0046-020	Central Hanging Plate Pack of 20	5 (2.2)
670X0070-018	Edge Hanger Pack of 18	5 (2.2)
630X2304-010	Omega SPLUS Channel 12"W (300 mm); Pack of 10	8 (3.6)
620X1304-005	Omega SPLUS Bracket 12"W (300 mm); Pack of 10	7 (3.1)
60501-X12	Wall Angle Support Kit 12"W (300 mm), Each	2.3 (1.0)
60506-X06	Elevation Kit, Each 4"-6"H (100 mm-150 mm)	3.5 (1.6)
60500-X01	Radius Drop 5.75"W (146 mm)	1.7 (0.8)
620X6010-010	Mini Universal Bracket Pack of 10	3 (1.3)
67020139-010	Data Outlet Radius Drop Black Plastic; Pack of 10	1 (0.4)
68000110-020	Cable Tie Clip Black Plastic; Pack of 20	1 (0.4)
68000058-001	Cutting Tool, Each	4 (1.8)
68000032-020	Grounding Connector Pack of 20	2 (0.9)
<i>Note: Not every product is available in all finishes. Some accessories are available in powder coat only.</i>		



Visit [www.chatsworth.com](http://www.chatsworth.com) for more information on our pathway products and a complete part number listing.

[www.chatsworth.com](http://www.chatsworth.com) • [techsupport@chatsworth.com](mailto:techsupport@chatsworth.com) • +1-800-834-4969

While every effort has been made to ensure the accuracy of all information, CPI does not accept liability for any errors or omissions and reserves the right to change information and descriptions of listed services and products. ©2019 Chatsworth Products, Inc. All rights reserved. Chatsworth Products, CliK-Nut, CPI, CPI Passive Cooling, eConnect, Evolution, GlobalFrame, MegaFrame, Motive, QuadraRack, RMR, Saf-T-Grip, Secure Array, SeismicFrame, SlimFrame, TeraFrame and Velocity are federally registered trademarks of Chatsworth Products. CUBE-iT, EuroFrame and Simply Efficient are trademarks of Chatsworth Products. All other trademarks belong to their respective companies. Rev.6 08/19 MKT-60020-292