

# Installation Instructions

## RMR BUSBAR HARDWARE KIT

### Safety Information



**WARNING:** Improper use of this product may lead to serious injury. Read and understand all instructions for proper installation and use of this product.

### Tools Required

#2 Phillips Screw Driver

### Included Hardware

- (3) M6 Drop-in Nut
- (3) M6 Serrated Flange Hex Nut
- (3) M6x16 Pan Head Screw


### Assembly Sequence

#### Frame Mounting

1. Insert M6 Drop-in nuts into Double-D Cam Hole on frame member at corresponding mounting locations on busbar. Rotate M6 Drop-in Nut 90 degrees using straight screw driver to engage frame.
2. Install insulator blocks onto drop-in nuts in frame using M6x16 panhead screws.
3. Attach busbar onto insulator blocks using taptite screws.

#### Equipment Rail Mounting

1. Install insulator blocks onto equipment rail using M6x16 panhead screws and M6 serrated flange nuts.
2. Attach busbar onto insulator blocks using taptite screws.

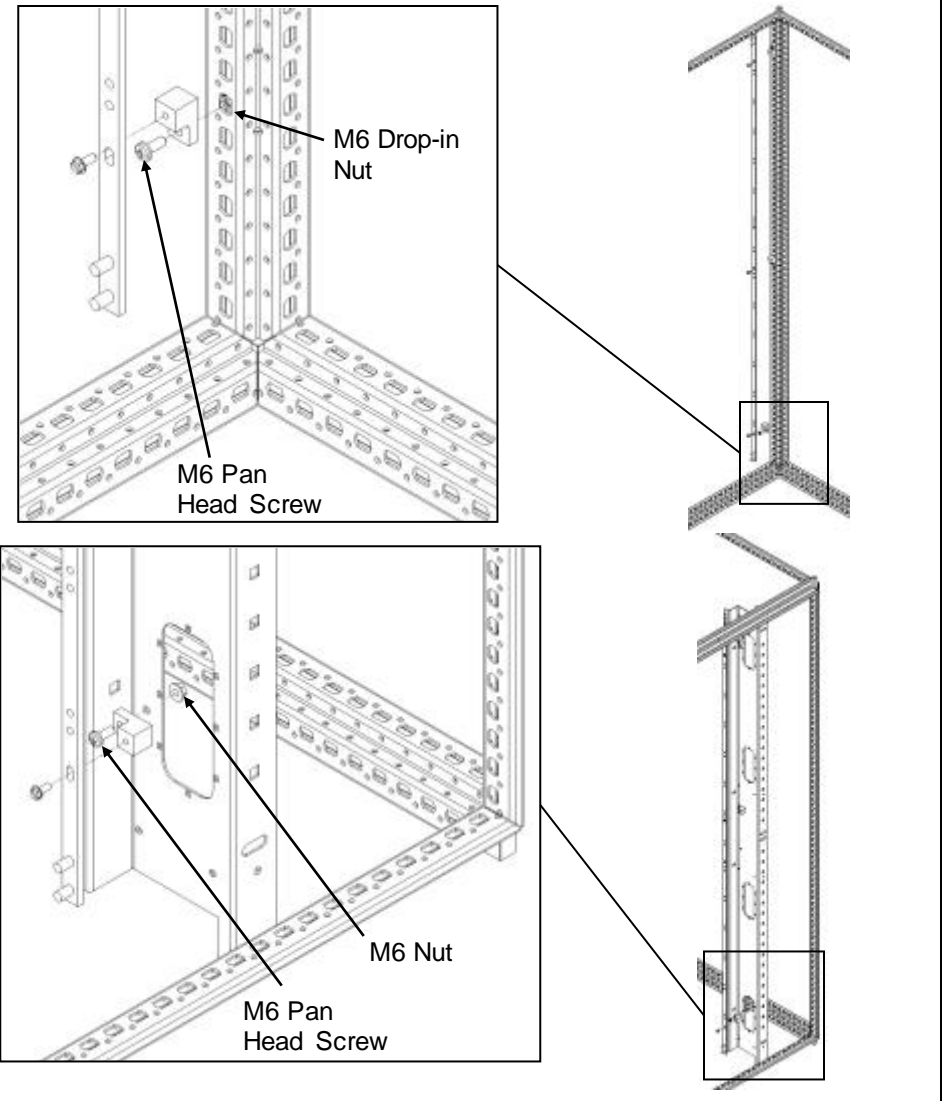

IIS-737943, 08/10/16, Rev. 1, CPI/JAG  
800-834-4969 (USA & Canada) • [www.chatsworth.com](http://www.chatsworth.com) • [techsupport@chatsworth.com](mailto:techsupport@chatsworth.com)  
For international phone numbers, see our website or contact CPI Tech Support.

*This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.*