

Installation Instructions

VELOCITY® HORIZONTAL CABLE MANAGER

Tools Required

#2 Phillips screwdriver

Parts List

Horizontal Manager

Horizontal Cover

4 each 12-24 X 1" rack mounting screws (smaller)

4 each M6 X 25mm rack mounting screws (larger)


Application

Rack-mount cable manager organizes patch cords and cables above and below patch panels and network switches.

- Installation requires four equipment mounting screws for the 2 RMU and 3 RMU heights and two equipment mounting screws for the 1 RMU height.
- The cover will open up or down and can be removed when cabling. A detent allows the cover to be locked in the up or down position when cabling.
- The doors may be cleaned with soapy water; do not use solvents or harsh cleaners.

Assembly Sequence

1. Remove the Horizontal Cover from the Horizontal Panel. The cover snaps onto the ends of the plastic, T-shaped cable guides (fingers).
2. Align the Horizontal Panel with the desired RMU spaces on the rack. The mounting holes at the back of the panel will align with rack-mount holes on the rack.
3. Install the panel with four equipment mounting screws (two screws on 1 RMU size) using a #2 Phillips screwdriver. Tighten one half turn after screw bottoms out. Ensure that you use the correct size screw for your rack.
4. Reattach the Horizontal Cover taking care to keep it centered on the manager.
5. Dress cables into the manager using the plastic fingers to organize cables.

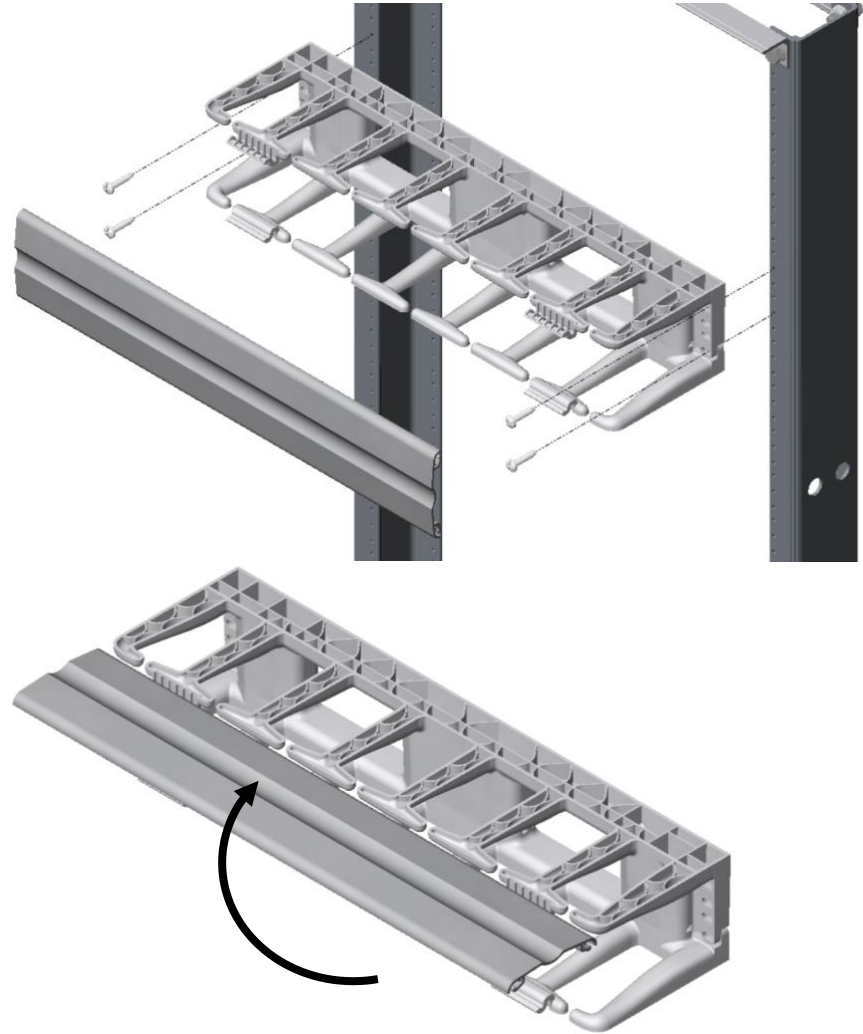

CHATSWORTH PRODUCTS, INC.

IIS-713930, 12/01/09, Rev.1 , JJY

800-834-4969 • techsupport@chatsworth.com • www.chatsworth.com

This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.