



ENCLOSURE BACKBOX

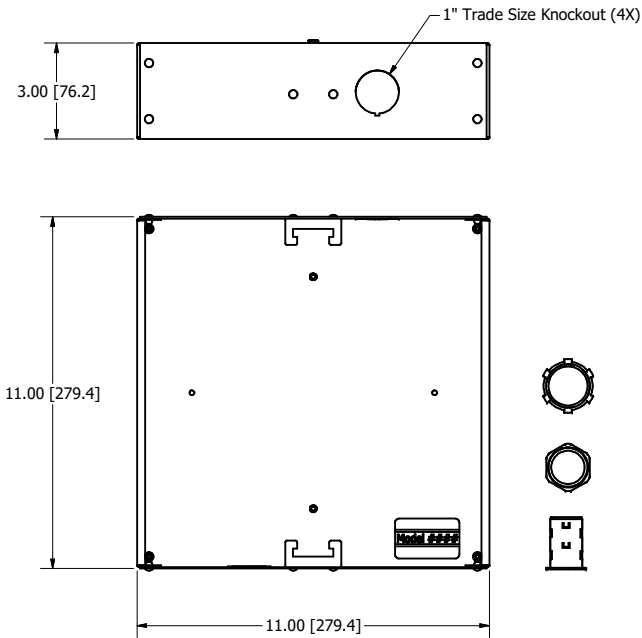

TRIM

**NOTE: Trim cutout specific to access point

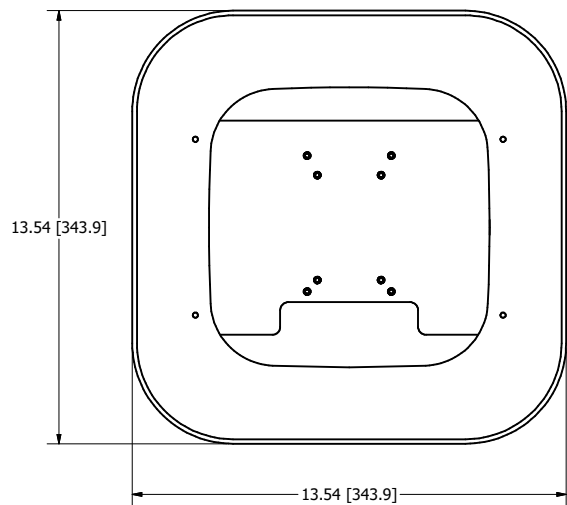

NOTE: All materials used in the construction of Oberon products must be RoHS compliant and meet RoHS2 Directive 2011/65/EU. Contact Oberon engineering if RoHS compliant materials are not available.

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
All	4	Updated Table	7/30/2019	KLD
All	5	Updated Configuration Table, "Includes" List, and Notes	1/15/2020	CAH
All	6	Updated Configuration Table	1/17/2020	CAH
All	7	Updated "Includes" List, RoHS Statement, Configuration Table	1/22/2020	CAH
All	8	Updated Configuration Table	8/29/2022	RLC

CONFIGURATION TABLE		
MODEL NUMBER	TRIM PART NUMBER	ACCESS POINT
1043-ANTMNT	37-104X-ANTMNT-S2	For Antennas or as Blank Cover
1043-ARAP315	37-104X-ARAP315-S2	Aruba AP315
1043-AP335	37-104X-AP335-S2	Aruba AP335 or AP345
1043-ARAP505	37-104X-ARAP505-S2	Aruba AP505
1043-ARAP515	37-104X-ARAP515-S2	Aruba AP515
1043-ARAP535	37-104X-ARAP535-S2	Aruba AP535
1043-ARAP555	37-104X-ARAP555-S2	Aruba AP555
1043-ARAP635	37-104X-ARAP635-S2	Aruba AP635
1043-ARAP655	37-104X-ARAP655-S2	Aruba AP655
1043-CCOAP	37-104X-CCOAP-S2	Cisco 2700, 3700 Series APs
1043-CCOAP3800	37-104X-CCOAP3800-S2	Cisco 2800, 3800 Series APs
1043-COAP4800	37-104X-COAP4800-S2	Cisco 4800 Series APs
1043-COAP9115	37-104X-COAP9115-S2	Cisco 9115i Series APs
1043-COAP9120	37-104X-COAP9120-S2	Cisco 9120i Series APs
1043-COAP9130	37-104X-COAP9130-S2	Cisco 9130i Series APs
1043-COAP9136	37-104X-COAP9136-S2	Cisco 9136i Series APs
1043-CW9166	37-1040-CW9166-S2	Cisco 9164, 9166 Series APs
1043-FL	37-104X-FL	General Purpose
1043-FLRD	37-104X-FLRD	General Purpose
1043-MIST43	37-104X-MIST43-S2	Juniper Mist 43 Access Point
1043-ND	ND	N/A (No Trim Included)

NOTES:

- Weight: 6 lbs.
- Material: 20 Ga. Galvanized Steel Backbox
20 Ga. White Powder Coated Steel Trim
(All SKUs Except -FL and -IBW)
ABS Plastic Trim (For -FL and -IBW SKUs Only)

Includes:

- (1) Backbox
- (1) Trim, Specific To Access Point
- (1) Dual Cable Egress Firestop Grommet
- (1) 1 in. Trade Size Conduit Connector
- (2) Adjustable Box Mounting Brackets
- Access Point Attachment Hardware
- (1) T-Bar Bracket (For -FL and -ANTMNT SKUs Only)
- (1) Cisco Mounting Bracket (For -FL SKUs Only)

UL Listed - File Number E348543

DRAWN	RLC	1/22/2020	Oberon, Inc. - 1315 S. Allen St. - State College, PA 16801	
CHECKED	RLC	8/29/2022	TITLE	
QA			Model 1043-XX	
MFG	RLC	8/29/2022	DWG NO	
APPROVED	RLC	8/29/2022	Model1043-XX_Customer_Prinf	
TOLERANCE:		.0 = +/- .030	SIZE	
		.00 = +/- .015	C	
		.000 = +/- .005	SCALE	
			SHEET 1 OF 1	